


Eletrocalhas




Eletrocalha Lisa

ELE




Eletrocalha Perfurada

EPE

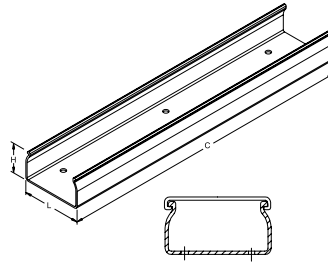

Tampa de pressão

TEE

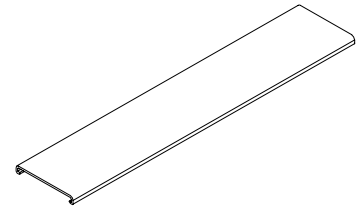

Como Especificar



TABELA DE CARGAS PARA ELETROCALHAS (ELE / EPE)

DIMENSÕES	DISTÂNCIA ENTRE OS SUPORTES (mm) / CARGAS (kgf/m)				
	1000mm	1500mm	2000mm	2500mm	3000mm
50x50	150	30	30	12	8
100x50	195	40	45	21	15
150x50	390	140	80	45	20
200x50	490	145	95	50	27
300x50	560	170	110	60	30
100x100	785	235	150	80	30
150x100	895	270	165	90	35
200x100	980	295	180	105	45
300x100	1120	335	210	120	50
400x100	1260	374	239	135	55
500x100	1417	418	272	151	61
600x100	1594	467	310	169	67

Consideramos flexão máxima de 1/200